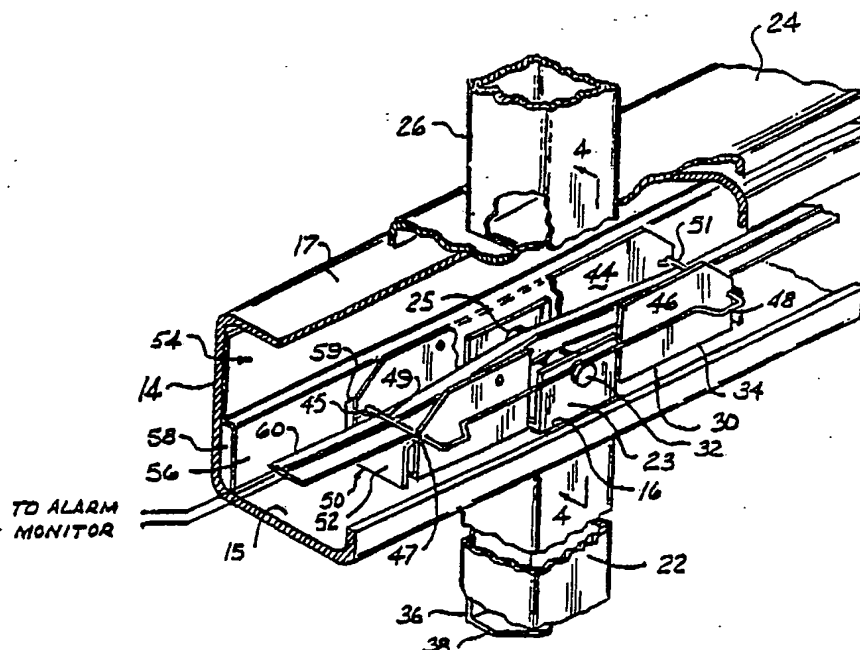


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>4</sup> :</b>  <b>G08B 13/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 89/01212</b>  <b>(43) International Publication Date:</b> 9 February 1989 (09.02.89)
<b>(21) International Application Number:</b> PCT/US88/02671 <b>(22) International Filing Date:</b> 4 August 1988 (04.08.88)  <b>(31) Priority Application Numbers:</b> 082,010 212,844 <b>(32) Priority Dates:</b> 4 August 1987 (04.08.87) 29 June 1988 (29.06.88) <b>(33) Priority Country:</b> US  <b>(71) Applicant:</b> OMNI SIGNAL, INC. [US/US]; Post Office Box 801, Capitola, CA 95010 (US). <b>(72) Inventors:</b> HUSMANN, Robert, J. ; 5614 Old San Jose Road, Soquel, CA 95073 (US). HAMRICK, Claude, A.S. ; 1560 Silacci Drive, Campbell, CA 95008 (US). <b>(74) Common Representative:</b> HAMRICK, Claude, A., S.; Rosenblum, Paris & Bacigalupi, 55 Almaden Blvd., Fifth Floor, San Jose, CA 95113 (US).		<b>(81) Designated States:</b> AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** SENSOR DEVICE FOR PICKET BARRIER INTRUSION DETECTION AND LOCATION SYSTEM**(57) Abstract**

An alarm actuating picket barrier intrusion sensor device including a t-shaped rocker element (34) for rigid attachment to the upper end of a picket (22) and for disposition within the rail (14) providing support for the picket, an elongated rocker spring (50) pivotally engaged at its mid-point by a pin (32) passed through the end of the picket and including downwardly turned end legs (52) for engaging the lower wall of the rail and for exerting a biasing force on the picket tending to resist downward translation thereof, and a length of dual conductor "tape switch" (60) which extends generally along the longitudinal axis of the rail and passes between the rocker element and the rocker spring, whereby downward forces applied to the picket, or lateral forces tending to bend the picket, cause the tape switch to be pinched between at least one extremity of the rocker spring and a portion of the rocker element.

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

-1-

Sensor Device for Picket Barrier Intrusion  
Detection and Location System

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates generally to motion detecting apparatus and more particularly to a novel sensing device to be contained within a longitudinally extending rail of a picket fence for attachment to one end of a picket in the fence for the purpose of detecting motion of the picket or associated finial in the event of an attempted intrusion.

This application is related to copending U.S. Application Serial No. 767,174 Filed 08/19/85 and entitled "Picket Barrier and Intrusion Sensing System" and Serial No. 034,410 filed April 3, 1987 and entitled "Picket Barrier and Intrusion Sensing System" and U.S. application Serial No. 82,029 filed August 4, 1987 entitled "Alarm Locator Module for Picket Barrier Intrusion Detection and Location System", all of which are assigned to the assignee of the present invention.

DISCUSSION OF THE PRIOR ART

Prior art associated with the detection of intrusion through security fences and similar barriers is discussed in detail in the above referenced pending applications and the disclosure thereof is expressly incorporated herein by reference.

SUMMARY OF THE PRESENT INVENTION

A primary objective of the present invention to provide a motion sensing mechanism for attachment to one end of a picket in a picket fence to detect bending of the picket, and longitudinal translation of the picket.

-2-

1           Another object of the present invention is to provide a sensing  
2 mechanism of the type described which also detects bending deflection  
3 of finials associated with the pickets.  
4

5           Another objective of the present invention is to provide a  
6 device of the type described which can be inexpensively fabricated from  
7 sheet metal, or made of suitable molded plastic materials, which can be  
8 easily assembled by unskilled labor.  
9

10          Still another objective of the present invention is to provide a  
11 sensing device of the type described which although sensitive to the  
12 stated motions to be detected is not highly dimension critical in  
13 construction.  
14

15          Yet another objective of the present invention is to provide a  
16 sensing device of the type described which when placed in a  
17 longitudinally extending picket holding rail is substantially unaffected  
18 by normal environmental elements and thus requires little if any  
19 maintenance over its useful lifetime.  
20

21          Briefly, a preferred embodiment of the present invention  
22 includes a generally T-shaped rocker component adapted to be rigidly  
23 attached to the upper end of a picket and to be disposed within the upper  
24 longitudinally extending rail providing support for the picket, an  
25 elongated rocker spring component pivotally engaged at its mid-point by  
26 a pin passed through the end of the picket and including downwardly  
27 turned end legs adapted to engage the lower wall of the rail and to exert  
28 a biasing force on the picket tending to resist downward translation  
29 thereof, and a length of dual conductor "tape switch" (sometimes  
30 referred to as "ribbon switch") the longitudinal axis of which extends  
31 generally along the longitudinal axis of the rail and passes between the  
32 rocker component and the rocker spring, whereby downward forces  
33 applied to the picket, or lateral forces tending to bend the picket, cause

-3-

1 the tape switch to be pinched between at least one extremity of the  
2 rocker spring and a portion of the rocker component, thereby creating an  
3 electrical short at the pinch point which emulates the closing of a  
4 switch that can be sensed by suitable electrical or electronic apparatus  
5 coupled to the conductors forming the tape switch. A modified  
6 embodiment includes a lever arm pivotally attached to the rocker  
7 member and having one end connectable to a finial plate and a second end  
8 for pinching the tape switch in the event a finial is deflected. In  
9 accordance with the present invention, one of the above-described  
10 sensing devices would be coupled to at least every other picket forming  
11 the picket barrier.

12  
13 An important advantage of the present invention is that it is  
14 simple in structure and easy to install, either at a assembly point or in  
15 the field.

16  
17 Another important advantage of the present invention is that it  
18 may be fabricated from relatively inexpensive materials using relatively  
19 inexpensive molding or forming techniques.

20  
21 Still another advantage of the present invention is that it does  
22 not include any unsealed electrical contacts which would otherwise be  
23 subject to corrosion due to hosti environmental elements.

24  
25 These and other objects and advantages of the present  
26 invention will no doubt become apparent to those skilled in the art after  
27 having read the following detailed disclosure of the preferred  
28 embodiments which are illustrated in the several figures of the drawing.

29  
30 IN THE DRAWING

31 FIG. 1 is a partially broken perspective view illustrating a  
32 portion of a picket fence of the type in which the present invention might  
33 be utilized.

-4-

1  
2 FIG. 2 is a partially broken perspective view taken generally  
3 along the line 2-2 of FIG. 1 and showing the principal operative  
4 components of a preferred embodiment of the present invention.

5  
6 FIG. 3 is an exploded perspective view showing the several  
7 components of the preferred embodiment illustrated in FIG. 2.

8  
9 FIGS. 4 and 5 are broken sectional views taken generally along  
10 the line 4-4 of FIG. 2 and illustrate operation of the preferred  
11 embodiment.

12  
13 FIG. 6 is a partially broken cross sectional view taken generally  
14 along the line 6-6 of FIG. 1 and depicting a modified sensing device  
15 adapted to additionally detect motion of the fence finials.

16  
17 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

18 Referring now to FIG. 1 of the drawing, a portion of a picket  
19 fence or barrier is shown including a post 10 that typically is fabricated  
20 of steel and embodied in a concrete base 12. Attached to and extending  
21 between post 10 and similar additional posts typically spaced along the  
22 fence line at 8 to 10 foot intervals are horizontal steel rails 14 and 18  
23 typically formed of a steel channel having a C-shaped transverse cross-  
24 section. Extending into openings 20 formed in the upper surface of lower  
25 rail 18 and similar openings 16 (not shown in FIG. 1) formed in the lower  
26 surface of the upper rail 14 are pickets 22 made of either solid rods or  
27 hollow steel tubes of square or rectangular cross section.

28  
29 In accordance with the present invention, and as will be more  
30 fully disclosed below, the pickets 22 are not rigidly affixed to the rails  
31 14 and 18 and are free to move upwardly or downwardly a short distance.  
32 Affixed to the top surface of the top rail 14 by means of suitable lugs or

-5-

1 pins, also described below, are finial support plates 24 to which a  
2 plurality of upwardly extending finials 26 are rigidly affixed.

3  
4 For purposes of the following discussion, lateral translation or  
5 deflection of the pickets 22 is intended to mean motion directed  
6 generally in the X-Y plane, while axial translation or up and down motion  
7 of the pickets will mean motion generally along the Z axis. Finial motion  
8 will generally be considered to be rotation about the longitudinal axis of  
9 the upper rail 14 and in a direction to one side or the other of the fence.

10  
11 Turning now to FIG. 2 of the drawing, which is a partially  
12 broken perspective view taken generally along the line 2-2 of FIG. 1,  
13 showing an assembled sensing device 30 in accordance with the present  
14 invention in place in the rail 14, and FIG 3 which is an exploded view of  
15 the sensing device 30 showing its component parts, as indicated, the  
16 upper end of picket 22 extends through the opening 16 in the bottom of  
17 rail 14 and terminates in upstanding side tabs 23 having openings 25  
18 formed therein for receiving a pin 32. Disposed between tabs 23 is a T-  
19 shaped rocker member 34, more clearly depicted in the exploded view of  
20 the FIG. 3, including a downwardly projecting portion 36 having a  
21 forwardly extending tab 38 at its distal end, and laterally extending  
22 arms 40 and 42 at its upper end formed to have upstanding side portions  
23 44 and 46 provided with notches 45 and 47 respectively, which are  
24 adapted to receive a spring clip 48. Note that the notches 45 are  
25 positioned slightly lower than the notches 47 so as to accommodate the  
26 downward offset 49 in each end of the clip 48. An aperture 43 is also  
27 centrally positioned in the upstanding side 44 for receiving one end of  
28 the pin 32.

29  
30 Shown in its assembled position in FIG. 2 and exploded into  
31 position above the rocker 40 in FIG. 3 is a rocker spring 50 having down  
32 turned ends 52 which rest upon the lower inside surface 15 of rail 14.

-6-

1 Assembly of the sensor 30 is accomplished by first inserting  
2 the leg 36 of member 40 through the opening 16 in rail 14 and into the  
3 upper end of picket 22 as the picket and is inserted into the opening 16.  
4 The rocker spring 50 is then positioned as indicated between the sides  
5 44 and 46 and the pin 32 is inserted through the openings 25 in picket  
6 tabs 23 and the opening 43 (FIG. 3) in rocker arm sidewall 44. Note that  
7 pin 32 passes over the top of rocker spring 50. The tape switch 60 is  
8 then laid between the walls 44 and 46, and over the top of pin 32 and the  
9 ends of rocker spring 50. To complete the assembly of sensor 30, spring  
10 clip 48 is inserted into the notches 45 and 47 and over the top of tape  
11 switch 60. At the same time, the center of spring 48 is raised slightly  
12 to clear the end of pin 32 and is then allowed to spring downwardly into  
13 engagement with the annular groove 33 formed in the end of pin 32  
14 thereby locking pin 32 in place.  
15

16 In FIG. 2 a side plate 54 is also shown which has an offset  
17 bottom half 56 that forms a passageway 58 for additional conductors.  
18 Plate 54 also has a plurality of rectangular openings 59 (see also FIG 6)  
19 which receives an end of pin 32 and the ends of clip 48. The upper edge  
20 of openings 59 are positioned slightly above the rest position of the clip  
21 ends and interfere therewith to limit the upward travel of pickets 22.  
22

23 Turning now to Figs. 4 and 5, operation of the sensor 30 will be  
24 illustrated and described in detail. As depicted by the dashed lines, the  
25 sensor 30 and picket 22 is normally biased into its rest position by the  
26 engagement of pin 32 and rocker spring 50. Rocker spring 50, beneath  
27 ends of spring clip 48 and over pin 32. However, when a downward force  
28 is applied to picket 22 it will be appreciated that, as illustrated,  
29 downward motion of picket 22 will cause a resilient deformation of  
30 rocker spring 50, and because of the coupling of rocker 30 to picket 22  
31 by pin 32, rocker 30 will likewise be pulled downwardly. As this occurs,  
32 the ends 51 and 53 of clip 48 will engage tape switch 60 and pinch it  
33 between the upper surface of each end of rocker spring 50 as shown in



-7-

1 the encircled portions of the drawing. Either one or both of these  
2 pinching contacts will cause a short in the tape switch 60 which will be  
3 detected by remote detection means (typically an alarm monitoring  
4 system) coupled thereto. In the event the downward force is then  
5 removed from picket 22, the picket and rocker will be returned to their  
6 rest position by rocker spring 50 and the pinching action will be abated,  
7 and the short will open due to the resilient characteristics of the tape  
8 switch.

9  
10 In FIG. 5 a similar result is depicted in response to a bending  
11 force applied to the picket 22. However, in this case, only the spring clip  
12 end 53 will pinchingly engage tape switch 60 and signal an alarm  
13 condition. Note that the pivoting action takes place as the rocker 30 and  
14 picket 22 rotate as a unit about the right edge of rail opening 21.

15  
16 Turning now to FIG. 6 of the drawing, a modified version of  
17 sensor 30 is shown at 130. This embodiment is modified to include an  
18 upper lever element 70 which is pivotally secured to the side walls of  
19 rocker 130 by pivot pin 72. Element 70 in the illustrated embodiment is  
20 fabricated from sheet metal and includes an elongated upper lever  
21 forming portion 74 and down turned side portions 76 forming stiffening  
22 members having apertures formed therein for receiving the pin 72. A  
23 downwardly turned leg 78 terminates in a tape switch engaging foot 80.  
24 The left most end 82 of lever portion 74 forms a fork like member  
25 extending on each side of a stud 84 which rigidly attached to the bottom  
26 surface of the finial supporting member 24.

27  
28 Stud 84 is provided with means forming a pair of shoulder  
29 flanges 86 for engaging a resilient spring member 88. A flat washer 90  
30 is secured to the lower end of stud 84 by a bolt 92.

31  
32 In operation, spring 88 normally maintains finial support  
33 member 24 in firm contact with the upper surface 17 of rail 14.

-8-

1 However, in the event that a force transverse to the longitudinal axis of  
2 rail 14 is applied to any finial 26, it will cause the member 24 to rotate  
3 upwardly about an edge thereof, and in so doing pull stud 84 upwardly  
4 through the opening 85 and against the force of spring 88. Such upward  
5 movement will cause washer 90 to engage the fork end 82 of lever 74  
6 and cause the lever member 70 to rotate clockwise about pin 72 causing  
7 the foot 80 to clampingly engage tape switch 60 and cause a short  
8 therein as illustrated by the dashed lines at 61. By selecting the  
9 characteristics of spring 88, it will be appreciated that the minimum  
10 force applied to finial 26 which will cause the alarm actuating  
11 engagement of foot 80 and tape switch 60 can be predetermined. In  
12 accordance with the preferred embodiment, such a force might fall  
13 within the range of 30 to 60 pounds of force applied to the distal end of  
14 any finial 26.

15  
16 Similarly, the spring characteristics of rocker spring 50 can be  
17 selected so that a downward force in excess of some predetermined  
18 amount must be applied to picket 22 before the wire portions 51 and 53  
19 (FIG. 2) are caused to engage tape switch 60.

20  
21 In the preferred embodiment, at least one of the modified  
22 sensors 130 shown in FIG. 6 would normally be incorporated into each  
23 segment of rail 14 so as to detect any lateral forces applied to the  
24 finials 26 along that segment of fence. If a single sensor 130 is  
25 utilized, it would normally be placed at a mid-point along the length of  
26 the rail 14. If two or more sensors 130 are utilized in each rail  
27 segment, they would typically be positioned at equal intervals along the  
28 length of the rail segment.

29  
30 It will thus be appreciated that in accordance with the present  
31 invention a means is provided which will signal the application of a  
32 bending force causing at least a predetermined deformation of any picket  
33 22, or a vertical translation of any picket 22 in response to a

-9-

1 predetermined downward force, or a lateral deflection of any finial 26 in  
2 response to a predetermined force applied thereto.

3  
4 Although the illustrated preferred embodiments are described  
5 as being made of sheet metal deformed to form various operative  
6 elements, it will be appreciated that any or all of the parts could  
7 alternatively be formed in other functionally corresponding  
8 configurations and could also be molded from suitable plastics or other  
9 materials. Note that as configured in the drawing the assembly of the  
10 several components can be accomplished through the open side of rail 14  
11 prior to the insulation of a suitable closure plate.

12  
13 Although the present invention has been illustrated above in  
14 terms of particular embodiments, it will be understood that numerous  
15 alterations and modifications will become apparent to those skilled in  
16 the art. Accordingly, it is intended that the appended claims be  
17 interpreted to include all such alterations and modifications as fall  
18 within the scope of the claims.

SUBSTITUTE SHEET

-10-

IN THE CLAIMS

1  
2 1. A sensor device for disposition in a horizontally extending rail of a  
3 picket fence having a plurality of vertically disposed pickets,  
4 comprising:

5 an elongated rocker element adapted to have its mid-point  
6 rigidly attached to the upper end of a picket passing through an aperture  
7 in the bottom of said rail;

8 an elongated rocker spring associated with said rocker element  
9 and tending to bias said rocker element and said picket into a rest  
10 position;

11 a length of tape switch including first and second spaced apart  
12 conductors extending over the top of said rocker spring; and

13 clip means affixed to said rocker element and lying over said  
14 tape switch, whereby a force applied to said picket moving any part of  
15 said rocker element downwardly will cause said clip means to pinch said  
16 tape switch against said rocker spring and cause shorting contact  
17 therein.  
18

19 2. A sensor device as recited in claim 1 and further comprising:

20 a lever means pivotally affixed to said rocker arm and having  
21 one end coupled to finials disposed above said rail and an opposite end  
22 disposed above and proximate said tape switch, whereby deflection of  
23 said finials will cause said lever means to rotate and pinchingly engage  
24 said tape switch and cause a short therein.  
25

26 3. An alarm actuating sensor means for disposition in a horizontally  
27 extending rail of a picket fence including a plurality of elongated  
28 vertically disposed pickets, comprising:

29 a length of deformable, signal conducting material for  
30 connection to an alarm device and operable when deformed to develop a  
31 deformation responsive signal for communication to said alarm device;

-11-

1 a rocker element for attachment to an end of a picket and  
2 including means for deformably engaging said signal conducting material  
3 when said picket is axially translated or laterally deflected; and  
4 spring means for biasing said rocker element into a rest  
5 position normally out of deforming engagement with said signal  
6 conducting material,

7 whereby when a force is applied to said picket causing at least  
8 a predetermined axial translation or lateral deflection thereof, said  
9 rocker means is moved from said rest position into actuating engagement  
10 with said signal conducting material causing deformation thereof which  
11 in turn causes a responsive signal to be communicated to said alarm  
12 device.

13  
14 4. An alarm actuating sensor means as recited in claim 3 wherein said  
15 signal conducting material is a tape switch including a pair of metallic  
16 conductors extending parallel to each other in spaced apart relationship  
17 and enveloped in an insulating resilient material which normally  
18 maintains said conductors out of contact with each other, but when  
19 deformed allows said conductors to ohmically contact each other.

20  
21 5. An alarm actuating sensor means as recited in claim 3 wherein said  
22 spring means has a portion disposed on one side of said signal conducting  
23 material, and said means for deforming is disposed on the opposite side  
24 of said material such that when said rocker element is moved from said  
25 rest position, said signal conducting material is deformed against said  
26 portion of said spring means.

27  
28 6. An alarm actuating sensor means as recited in claim 3 wherein said  
29 rocker element is generally T-shaped and includes a vertically extending  
30 leg adapted to engage the end of said picket, and two laterally extending  
31 arms having distal extremities forming said means for deformably  
32 engaging said signal conducting material.  
33

-12-

1        7.        An alarm actuating sensor means as recited in claim 6 wherein  
2        said spring means includes an elongated spring member having down-  
3        turned ends, the distal portions of which rest upon an interior surface of  
4        said rail, and a mid-portion which is engaged by said rocker element.

5  
6        8.        An alarm actuating sensor means as recited in claim 3 and  
7        further comprising:

8                an elongated lever means coupled to a finial disposed above  
9        said said rail, said lever means being affixed to said rocker element and  
10       operative to cause deformation of said signal conducting material when  
11       said finial is deflected more than a predetermined amount from a rest  
12       position.

13  
14       9.        An alarm actuating sensor means as recited in claim 4 wherein  
15       said spring means has a portion disposed on one side of said signal  
16       conducting material, and said means for deforming is disposed on the  
17       opposite side of said material such that when said rocker element is  
18       moved from said rest position, said signal conducting material is  
19       deformed against said portion of said spring means.

20  
21       10.       An alarm actuating sensor means as recited in claim 9 wherein  
22       said rocker element is generally T-shaped and includes a vertically  
23       extending leg adapted to engage the end of said picket, and two laterally  
24       extending arms having distal extremities forming said means for  
25       deformably engaging said signal conducting material.

26  
27       11.       An alarm actuating sensor means as recited in claim 10 and  
28       further comprising:

29                an elongated lever means coupled to a finial disposed above  
30       said said rail, said lever means being affixed to said rocker element and  
31       operative to cause deformation of said signal conducting material when  
32       said finial is deflected more than a predetermined amount from a rest  
33       position.

-13-

1  
2 12. An alarm actuating sensor means as recited in claim 7 and  
3 further comprising:  
4 an elongated lever means coupled to a finial disposed above  
5 said said rail, said lever means being affixed to said rocker element and  
6 operative to cause deformation of said signal conducting material when  
7 said finial is deflected more than a predetermined amount from a rest  
8 position.

1 / 3

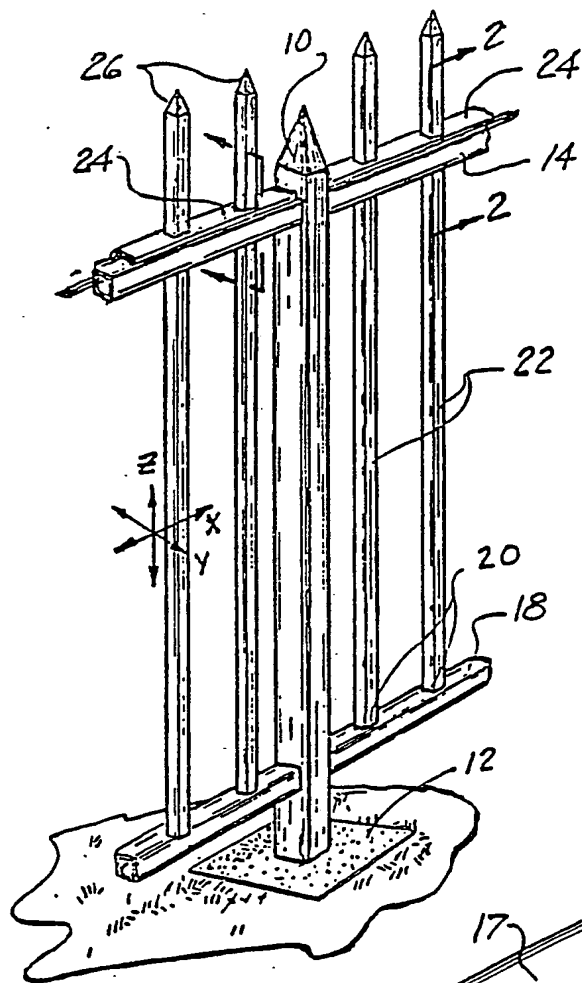


Fig. 1


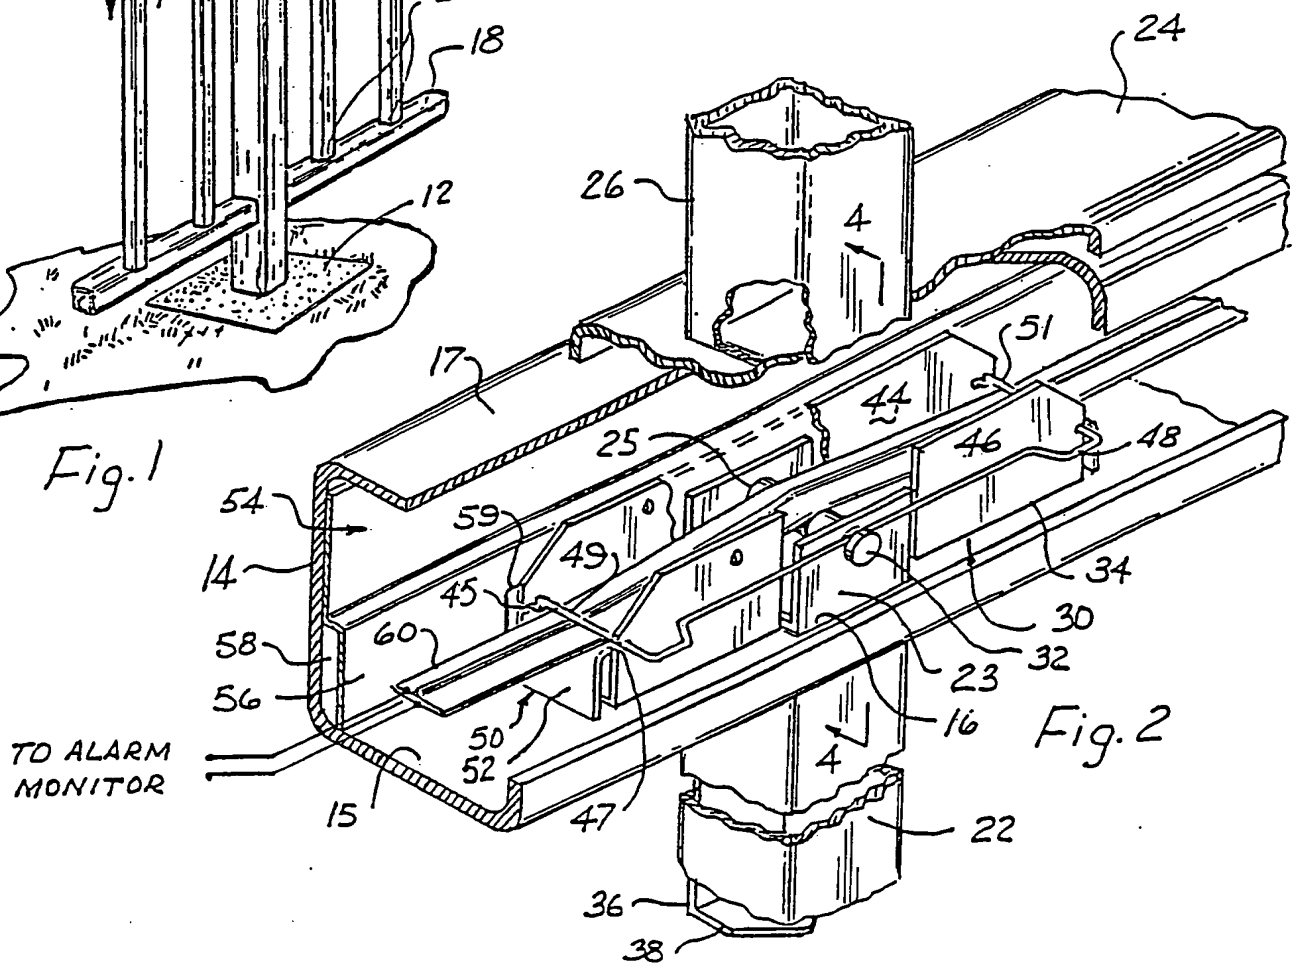


Fig. 2



2 / 3

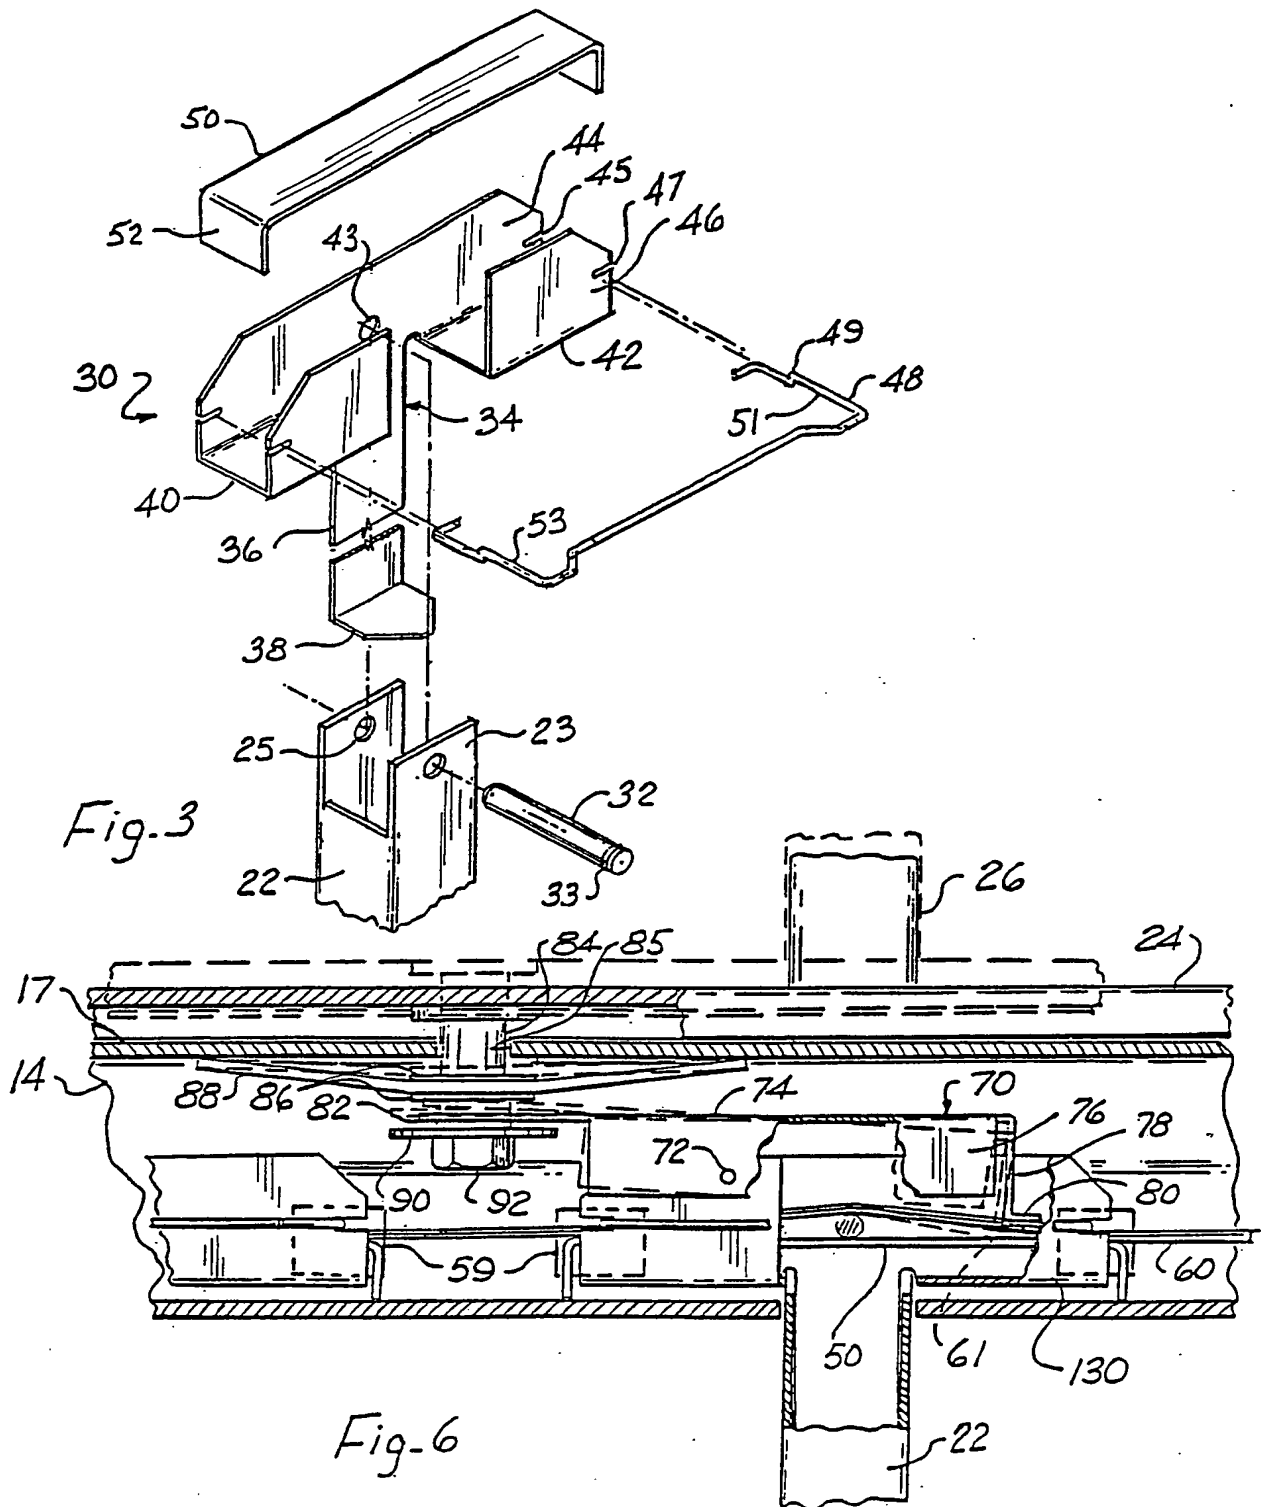

3 / 3

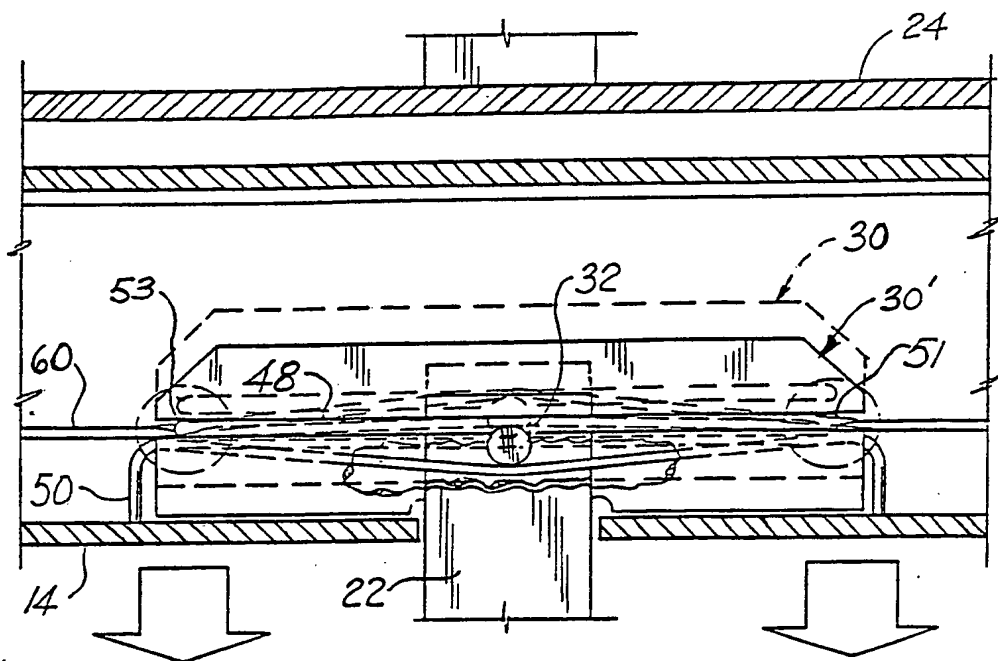


Fig. 4

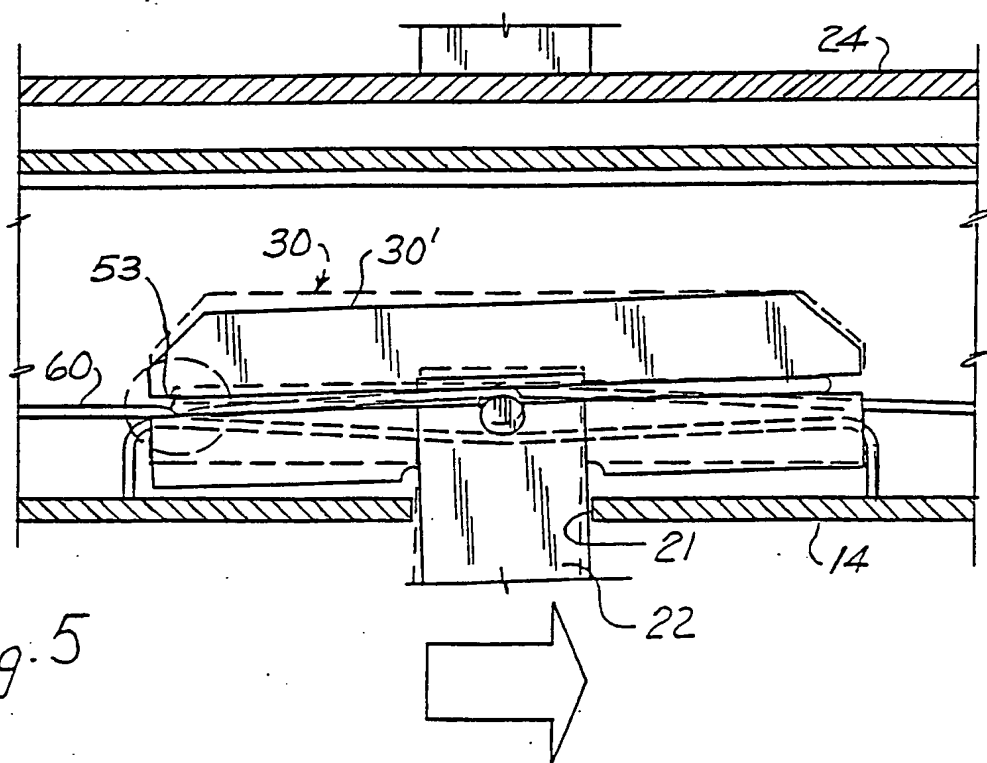



Fig. 5

# INTERNATIONAL SEARCH REPORT

International Application No. PCT/US88/02671

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC IPC (4): G08B 13/00 U.S. Cl. 340/550; 340/541		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>7</sup>		
Classification System	Classification Symbols	
U.S.	340/541, 550; 200/335, 339, 332	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>9</sup>		
Category *	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
A, P	US, A, 4,703,313 (Husmann et al.) 27 October 1987, See the entire document.	1-12
A	US, A, 4,683,356 (Stoler) 28 July 1987, See the entire document.	1-12
A	US, A, 4,155,083 (Slaats et al.) 15 May 1979, See the entire document.	1-12
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
12 October 1988	01 DEC 1988	
International Searching Authority	Signature of Authorized Officer	
ISA/US	<div style="text-align: right;">             Thomas J. Mullen Jr.         </div>	